

9-1-00

A

Express Mail Label No. EK830779476US

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
POU920000026US1

Total Pages in this Submission

TO THE ASSISTANT COMMISSIONER FOR PATENTSBox Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

Method and Apparatus for Providing Local Data Persistence for Web Applications

and invented by:

George E. Corbin and Joseph A. Kardash

10/012 U.S. PTO
09/652065If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 44 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☒ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
POU920000026US1

Total Pages in this Submission

Application Elements (Continued)

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☐ Formal Number of Sheets _____
- b. ☒ Informal Number of Sheets 9
4. ☒ Oath or Declaration
- a. ☒ Newly executed *(original or copy)* ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied
under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☒ Assignment Papers *(cover sheet & document(s))*
9. ☐ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☒ Information Disclosure Statement/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail *(Specify Label No.):* EK830779476US

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
POU920000026US1

Total Pages in this Submission

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)

16. ☐ Additional Enclosures (please identify below):

Fee Calculation and Transmittal


CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	11	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	3	- 3 =	0	x \$78.00	\$78.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$690.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$690.00

- ☐ A check in the amount of _____ to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 09-0463 as described below. A duplicate copy of this sheet is enclosed.
- ☒ Charge the amount of \$690.00 as filing fee.
 - ☒ Credit any overpayment.
 - ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
 - ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: August 31, 2000

CC:

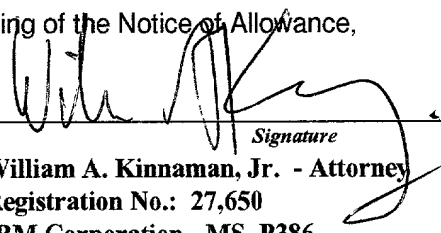
Signature
William A. Kinnaman, Jr. - Attorney
Registration No.: 27,650
IBM Corporation - MS P386
Intellectual Property Law
2455 South Road,
Poughkeepsie, New York 12601
Telephone: (845) 433-1175
Facsimile: (845) 432-9601

Docket No : POU920000026US1
Inventor : G. E. Corbin, et al.
Title : METHOD AND APPARATUS FOR
PROVIDING LOCAL DATA
PERSISTENCE FOR WEB
APPLICATIONS

APPLICATION FOR UNITED STATES
LETTERS PATENT

"Express Mail" Mailing Label No.: EK830779476US
Date of Deposit: August 31, 2000

I hereby certify that this paper is being deposited with the United States Postal Service as "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: Box Patent Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

Name: Billy R. Stacy

Signature: Billy R. Stacy

INTERNATIONAL BUSINESS MACHINES CORPORATION

METHOD AND APPARATUS FOR PROVIDING LOCAL DATA PERSISTENCE FOR WEB APPLICATIONS

NOTICE

A portion of the disclosure of this patent document contains material which is subject to copyright protection. The copyright owner has no objection to the facsimile reproduction by any one of the patent disclosure, as it appears in the Patent and Trademark Office patent files or records, but otherwise reserves all copyright rights whatsoever.

BACKGROUND OF THE INVENTION

1. Field of the Invention

This invention relates to a method and apparatus for providing local data persistence for Web applications.

2. Description of the Related Art

Applications based upon markup languages such as HTML (Hypertext Markup Language) are notoriously well known in the art. In a typical configuration, a user at a client node accesses an HTML document at a server node by having an HTML client application at the client node issue a request to an HTML server application at the server node. Upon receiving such a request, the HTML server at the server node retrieves the requested document and transmits it to the HTML client at the client node. Typically, the client application is a Web browser on the user's personal workstation, while the server application is a Web server at a distant node. Typically, too, the client and the server communicate with each other over a network such as the Internet using a communication protocol such as Transmission Control Protocol/Internet Protocol (TCP/IP). In addition to containing text or graphics for display, an HTML document may contain areas for entry of data by the user, ultimately to be processed on either the client or the server.

A Web application (i.e., an HTML page containing functionality for user data entry) containing potentially secure information needs data persistence to avoid losing the user's data between invocations. One current industry solution for retaining data is JavaScript "cookies", defined in *Teach Yourself Java Script in a Week* (copyright 1996 by Sam.net Publishing) as "a method of storing information locally in the browser and sending it to the server whenever the appropriate pages are requested by the user". Cookies, however, have significant limitations for Web applications that must store data on the client side. Cookies are limited in size (4096 bytes) and the number of entries per domain (20 per cookie file). Also, cookies are not secure because other sites access the same cookie file.

A typical industry solution to storing potentially large amounts of potentially secure data is to use a Common Gateway Interface (CGI) on the server and store the data on a database maintained by the server. This has limitations and complications. The Web site administrator must maintain a list of usernames and passwords to provide security to the individual files. If Secure Sockets Layer (SSL) is not implemented, this is not a very secure method because the data must be transported across the Web while not encrypted.

Another approach (for Microsoft Internet Explorer only) has been a behavior called "userData". This is a function that can save the data in a proprietary format on the computer for retrieval at a later date. However, this solution has several pitfalls. The data is no longer portable, since if the user saves a page on his or her work computer, he or she cannot transport this data to a home computer for later retrieval. Also, this approach is limited to use with the Microsoft Internet Explorer 5.x Web browser, and cannot be used with other browsers such as Netscape Navigator.

SUMMARY OF THE INVENTION

The present invention provides a method for preserving program state data across invocations of a Web browser without the use of cookies, and with the additional benefit of giving users direct control over the disposition of their data.

In accordance with the invention, a Web application dynamically creates a new Web page containing a script function that, when loaded, restores all of the current data to the application. The dynamically created page is then saved locally by the user, using the standard File/Save As function of the client application. Upon return to the Web application, the user is prompted for the location of the saved file. When that location is entered, the page is automatically loaded, the script function run, and the application is returned to the state in which it was left.

As is well known to those skilled in the art, scripting languages such as JavaScript are interpreted language that is used to generate scripts in HTML files that are delimited by <SCRIPT> and </SCRIPT> tags. When an HTML browser encounters such a script in an HTML document that it is processing, the browser executes the statements contained in the script. The present invention uses script functions in the HTML documents making up a Web application to perform the desired operations of saving, restoring and the like.

More particularly, after a user completes a portion or all of the tasks in task panels, he or she can then choose to save the data to a location accessible from the workstation (e.g., a diskette, a zip disk, local hard drive, or a network drive). The data is saved in a file that is generated using the JavaScript interpreter function of the browser. The saved file is an HTML file containing a JavaScript restoration function and the field values the user entered, which are embedded in the script commands. The file is saved using a method similar to that for saving a file in an ordinary client application. The user utilizes the Web browser's ability to perform a "Save As" operation. This saves the dynamically created HTML file. Upon reentry into the tool at some later date the user is prompted for this file. If it exists the user may load the data from the saved file into the tool. This file may be transported via any normal file transfer method (e.g., a diskette, File Transfer Protocol (FTP), etc.) and used at other workstations using the supported browser and having a connection to the Internet Web server that holds the application.

All data gathered stays on the client running the Web browser unless the user explicitly

creates the data file and moves it via methods mentioned above. The user has complete control over where their data resides and what is done with it.

The present invention avoids the limitations of the prior art discussed above. The problem of data persistence is solved by saving the data locally. The 4096-byte size limit of cookies is eliminated; the only practical size limit is the memory limit for script functions such as JavaScript (which is almost limitless). The security issues are solved because the user has full control over the location of the data; the user may put it on a removable disk and store it in a secure location (such as a locked desk) if he or she wants. No other Web page has any access to local files, so the security fears of cookies are eliminated. There is no limit on the number of files that a user can save from a particular domain; the user can save as many different files as he or she chooses to and use them on another computer if desired.

Another advantage of the present invention is that to run the Web application, one need not depend on constant or speedy access to the Web. Since the present invention is not in any way tied to the server, it can be used in a disconnected mode from the Web server, and the whole package can be zipped up, downloaded and run locally on any computer by simply pointing a browser at it. Basically, this allows the whole of the application to reside on a disk which is locally accessible to the workstation, and the user can still save the data into the data file. That is to say, the application might reside on a CD and the user may use a laptop to run the tool. All on-line security or performance concerns are instantly eliminated because of this. To the knowledge of the inventors, this functionality has not been previously possible without actually installing an application on the client.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows a connected network configuration in which the present invention may be used.

Fig. 2 shows a disconnected "island" configuration in which the present invention may be used.

Fig. 3 shows a data entry window that is displayed in one embodiment of the present invention..

Fig. 4 shows a "save" window that is displayed when the user actuates the save button of the data entry window shown in Fig. 3.

Fig. 5 shows a "load" window that is displayed when the user actuates the load button of the data entry window shown in Fig. 3.

Fig. 6 shows the structure of the source version of the data entry window shown in Fig. 3.

Fig. 7 shows the structure of the source version of the save window shown in Fig. 4.

Fig. 8 shows the structure of the source version of the load window shown in Fig. 5.

Fig. 9 shows the interrelationship among the various documents collectively making up the Web application of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Fig. 1 shows one embodiment of the present invention in a network or connected configuration. As shown in the figure, a client/server system 100 comprises a client node 102 coupled to a server node 104 via a network connection 106.

Client node 102 may comprise any suitable personal workstation, such as an Intel-architecture machine running a version of the Microsoft Windows operating system (not separately shown); however, the platform choice is not critical. Executing on client node 102 is an HTML client 108 of any suitable type, such as Netscape Navigator or Microsoft Internet Explorer Web browser. Client node 102 also contains persistent storage for storing client data (in this instance, client-managed pages) 110 in a manner to be described.

HTML client 108 is JavaScript-enabled in the sense that not only can it read and display ordinary HTML files, but it can also interpret any JavaScript function contained in an HTML file being processed.

Similarly, server node 104 may comprise any suitable server system, such as an IBM or Sun Microsystems server, running any suitable operating system (not separately shown) such as Linux or some other version of the UNIX operating system. Executing on server node 104 is an HTML server 112 of any suitable type, such as the Apache Web server or the like. Server node 104 stores server data 114 comprising one or more Web pages thereon, comprising text or graphics, embedded applications, and the like.

Network connection 106 may comprise a public network such as the Internet, a private network such as a corporate intranet, or a network combining certain aspects of public and private networks, such as a virtual private network (VPN). The network connection 106 may be implemented in any suitable manner, such as a dialup connection, a local area network (LAN) connected to a wide area network (WAN) via a gateway, or the like.

In a manner well known in the art, as described in such publications as L. Aronson and J. Lowery, HTML 3.2 Manual of Style (1997), at pages 1-7, a user at the client node 102 accesses a Web page at the server node 104 by having the HTML client 108 issue a request over the network connection 106 containing the Internet address of the server node 104 and the directory location of the page being requested. Upon receiving such a request over the network connection 106, the HTML server 112 at server node 104 retrieves the requested page and forwards it to the HTML client at client node 102.

In the system 100 shown in Fig. 1, the HTML client 108 and the HTML server 112 reside at different nodes. While this is the customary configuration, it is not the only possible configuration. For example, one may dispense with the server node 104 and manage all data, including Web pages ordinarily stored at the server node, as client data 110 in a disconnected "island" configuration 200 as shown in Fig. 2.

1
A Web application that implements this invention would typically function as follows. When a
user wants to save data for a current session with the application, he or she clicks a "Save"
button. The application dynamically creates a new file. This file contains a JavaScript function
that is loaded whenever the user returns to the browser session. Once this page is created, the
user is prompted to save the page locally. The user must manually perform this step because
JavaScript itself is restricted from directly accessing the user's hard drive.

On returning to the application, the user is prompted for the location of the saved file. The user
enters the location, and the application loads the file and runs its function. The application
resumes at the state in which the user left it, with all previous data and at the same point in the
process.

Fig. 3 shows a data entry 300 window that is displayed to the user of the HTML client 108 in one
embodiment of the present invention. Data entry window 300 comprises a header frame 300a and
a base frame 300b. Header 302a is a persistent frame that is used while a session is active to hold
(but not display) data that is entered by the user. Base frame 302b is the frame where the data is
gathered from the user and where all output is displayed. The user traverses the Web pages
within the application 900 using this frame.

As shown in the figure, the base frame 300b of data entry window 300 contains a data entry area
302 as well as a "save" button 304, a "load" button 306 and a "build" button 308. The user
navigates to various lines of the data entry area 302 to enter data (in this case, sysplex
configuration data). When the user wants to save previously entered data, he or she actuates the
save button 304 (as by clicking on it with a mouse), resulting in the display of a "save" window
400 shown in Fig. 4. Similarly, if the user wants to load previously saved data, he or she actuates
the load button 306, resulting in the display of a "load" window 500 shown in Fig. 5. Finally,
when the user has finished entering data, he or she may actuate a "build" button 308 to have the
data processed by the Web application.

Fig. 4 shows the save window 400 that is displayed when the user actuates the save button 304 in the data entry window 300. Save window 400 contains a text message 402 that prompts the user to save the previously entered data locally, such as by selecting "File" on the toolbar 404, then selecting "Save As" on the drop-down menu that then appears, and entering the requested filename and path information. The "Save As" function is a standard function of HTML clients 108 such as Netscape Navigator and Microsoft Internet Explorer and therefore will not be described further in this specification.

Fig. 5 shows the load window 500 that is displayed when the user actuates the load button 306 in the data entry window 300. Load window 500 displays a text message 502 requesting the user to enter the name of the saved file in an area 504, possibly with the assistance of a "browse" button 506 if the user does not remember the filename or if it is stored in a different directory. The user then clicks on a "Reload Previous Data" link 508 to reload the previously saved data.

Fig. 9 shows the interrelationship among the various documents collectively making up the Web application 900 of the present invention. These include a frameset document 902, a header document 904, a base frame document 906, and a load document 908. Each of these documents is a separate HTML file. Frameset document 902 contains a head 910 that contains a script portion 912 and a body 914 that contains a first frame portion 916 and a second frame portion 918. Frame portions 916 and 918 define the boundaries of the displayed frames 300a and 300b of data entry window and contain references 920 and 922 to header file 904 and to base frame file 906, respectively, which contain the actual content of the frames. In addition to generating the display of the header 300a, header file 904 holds all the application data that is entered by the user in a form named "holddata" and in various arrays. Header file 904 only holds this data while the Web application is open and the user is interacting with it; for persistent storage of user data, the method of the present invention is used.

Fig. 6 shows the general structure of the base frame document 906 that is displayed as the base frame 300b of the data entry window 300. As shown in the figure, the base frame document 906 comprises a script portion 602 and a form portion 604. Script portion 602 in turn contains a

JavaScript function 606 for opening the load window 500. Form portion 604 contains, among other elements for eliciting user data, a build button portion 608 from which build button 308 is generated, a load button portion 610 from which load button 306 is generated, and a save button portion 612 from which save button 304 is generated. JavaScript function 606 is invoked when the user actuates the load button 306, as indicated by the line 614. In a similar manner, the JavaScript function in the frameset document 902 for saving user data is invoked when the user actuates the save button 306, as indicated by the line 616.

Fig. 7 shows the general structure of the HTML source file 700 (alternatively, the "save" file or the "save" page) that is displayed as the save window 400. In contrast to the preexisting documents 902-908 that make up the Web application 900, save file 700 is dynamically generated by the script function 912 in the head portion 910 of frameset document 902 when the user actuates the save button 304 in the data entry window 300. As shown in the figure, the source file 700 contains a form portion 702 that contains a table portion 704 and a script portion 706. Table portion 704 contains an HTML encoding of the displayed text message 402, while script portion 706 contains a script function for restoring the saved data to the data entry page 300. Script portion 706 is invoked when the file 700 is loaded from the client data area 110 on user actuation of the load link 508.

Fig. 8 shows the general structure of the load page 908 that is displayed as the load window 500. As shown in the figure, load page 908 contains a form portion 802 that generates the displayed elements 502-508 and a script portion 804 that opens the save file 700 containing the locally saved user data in response to user actuation of the reload link 508 in load window 500.

Appendix A shows the JavaScript function saveToDisk() that is invoked when the user actuates the save button 304 in window 300. This function, which resides in script portion 912 of frameset document 902, dynamically creates the save file 700 (Fig. 7), which is saved by the user locally (e.g., to disk) as an HTML file in user data 110. More particularly, as shown in this listing, the function saveToDisk() opens a new window (line 4), writes individual lines of data from the header document 904 to the HTML file 700 defining the window (lines 6-48), and then

closes the data stream to allow the newly generated window to be displayed as window 400 (line 49). Upon being reopened, this HTML file 700 repopulates the header document 904 of the Web application 900 with previously entered data, thus providing multi-session data persistence for a client-side Web application.

In Appendix A, the terms listed below have the following meaning:

'arrayList[]': An array in the header file 904 that contains the names of all other arrays in the file. This provides a way to add more arrays in the application without modifying this function to look for each individual array.

'url': Page currently on when this function is called (xxxxx.html). This provides a way to reenter the application at the point of saving.

'toolDescription': One-line text description of tool ("My Web Application")

Appendix B is a listing of other JavaScript functions in the script portion 912 of the frameset document 902. Lines 51-55 of this listing contain the JavaScript function set(field,newdata), which repopulates fields of the header document 904 with new data from the save document 700 when the save document 700 is loaded. This function is invoked by the JavaScript function saveFields() in the save document 700 through its statements of the form opener.parent.set(. . .), shown as lines 339-477 in Appendix D. Lines 60-66 of this listing contain the JavaScript function get(name), which retrieves the value of the field whose name is supplied as an input.

Appendix C is an HTML source listing of the base frame document 906 shown in Figs. 6 and 9. Lines 79-42 of this listing (delimited by the tags <SCRIPT . . .> and </SCRIPT>) contain script portion 602, which in turn contains the script function 606, loadFromDisk(), for opening load document 908 (lines 117-123). Lines 150-262 of this listing contain form portion 604 (delimited by the tags <FORM . . .> and </FORM>), which in turn contains build button portion 608 (line 254), load button portion 610 and save button portion 612 (line 256).

As noted above, and as indicated by the `onClick="loadFromDisk();"` attribute in line 256, actuation of the load button invokes the JavaScript function `loadFromDisk()` on lines 117-123. On the other hand, as indicated by the `onClick=parent.saveToDisk("interviews/ps_topics.html")` attribute in line 256, actuation of the save button invokes the JavaScript function `saveToDisk()` that is contained in the script portion 912 of the frameset document 902 and is reproduced in Appendix A.

Appendix D is an HTML source listing of the save file 700 shown in Fig. 7. Lines 521-526 of this listing (delimited by the tags `<FORM . . .>` and `</FORM>`) contain the form portion 702. Form portion 702 contains the table portion 704 (lines 303-332) for generating the displayed text message, as well as the script portion 706 (lines 336-496) delimited by the tags `<SCRIPT . . .>` and `</SCRIPT>` for restoring the saved data to the data entry page 300. Script portion 706 contains the script function `saveFields()` (lines 338-493), which is invoked when the page is loaded, as indicated by the `onLoad="saveFields"` attribute in line 301. On being invoked, the script function `saveFields()` repopulates header document 904, corresponding to the header portion 300a of the data entry page 300, with the previously saved data. As can be seen from scanning the lines of the function `saveFields()`, the data to be restored is embedded in the script function itself as the second argument of the various lines.

Appendix E is an HTML source listing of the load document 908 shown in Figs. 8 and 9. Lines 521-526 of this listing (delimited by the tags `<FORM . . .>` and `</FORM>`) contain the form portion 802 for generating displayed elements 502-508. Lines 511-516 of this listing (delimited by the tags `<SCRIPT>` and `</SCRIPT>`) contain the script portion 804 for opening the saved page 400. The JavaScript function `setlink()` (lines 512-515) contained in script portion 804 is invoked when the user clicks on the reload link 508 (line 525), as indicated by the `onClick=setlink()` attribute in line 522.

Appendix F is an HTML listing for the header document 904 shown in Fig. 9.

While a particular embodiment has been shown and described, various modifications will be apparent to those skilled in the art. Thus, while the Web documents generated in the preferred embodiment use the HTML markup language, the invention is not restricted to any particular markup language. Also, while the Web documents generated in the preferred embodiment use JavaScript functions to provide the desired functionality, other scripting languages supported by the Web browser could be used instead.

Appendix A: Function saveToDisk() in Frameset Document
Copyright © 1999 IBM Corporation

```

2  function saveToDisk(url) {
5  3
4  var xdist = screen.availWidth - 643;
5  remote =
    window.open('', "saveWin", "WIDTH=631, HEIGHT=350, screeny=0, screenx=" +
      xdist + ", resizable=0, menubar=1, status=0, scrollbar=0");
10 6  remote.opener.name = "opener";
7  remote.document.write('<HTML>\n<HEAD>\n');
8  remote.document.write('<SCRIPT LANGUAGE="JavaScript1.2">\n');
9  remote.document.write('function saveFields(){\n');
10 remote.document.write('}\n </SCR' + 'IPT>\n');
15 11 remote.document.write('\n</HEAD>\n');
12 remote.document.write('<BODY onLoad="saveFields()" onBlur="var timerID =
    setTimeout(\'\window.close()\', 20000)">\n<FORM NAME="restore">\n');
13 remote.document.write('<TABLE BORDER="0" WIDTH="560">\n');
14 remote.document.write('<TR>\n<TD>\n');
20 15 remote.document.write('<TABLE BORDER="0" WIDTH="100%">\n<TR
    BGCOLOR="#c8d8f8">\n<TD>\n<FONT SIZE="2" FACE="Arial, helv">\n');
16 remote.document.write('<B>' + toolDescription + ': Save & Restore
    Data</B>\n</FONT>\n</TD>\n</TR>\n</TABLE>\n</TD>\n</TR>\n');
25 17 remote.document.write('<TR><TD><P>\n This document contains the
    information you have entered into the ' + toolDescription + '.');
18 remote.document.write('</P></TD></TR>\n');
19 remote.document.write('<TR><TD><TABLE WIDTH="100%" BORDER="0">\n<TR>');
20 remote.document.write('<TD VALIGN=Top><FONT COLOR="blue"><STRONG>To Save
    Your Data:</STRONG></FONT>\n <OL>');
30 21 remote.document.write('<LI>Select <STRONG>File</STRONG> and then
    <STRONG>Save as...</STRONG> from the menubar at the top of this
    window.</LI>\n');
22 remote.document.write('<LI>In the Save As... dialog box, choose a name
    and directory location for the configuration data file and click the
35 Save button.</LI>\n');
23 remote.document.write('<LI>Close this
    Window.</LI>\n</OL></TD>\n</TR>\n');
24 remote.document.write('<TR><TD><HR NOSHADE COLOR="#CCCCCC">Once you have
    saved your data, you can quit the ' + toolDescription + ' and return to
40 it later. ');
25 remote.document.write('When you return, you will be given instructions
    to load the saved file and resume your work.</TD></TR>');
26 remote.document.write('</TABLE></TD></TR>\n');
27 remote.document.write('<TR>\n<TD WIDTH="100%" HEIGHT="40">\n');
45 28 remote.document.write('<TABLE BORDER="0" CELLPADDING="0" CELLSPACING="3"
    WIDTH="100%">\n<TR><TD COLSPAN="6" WIDTH="100%"><HR NOSHADE
    COLOR="#CCCCCC"></TD></TR>\n');
29 remote.document.write('</TABLE>\n</TD></TR></TABLE>\n');

```

```
remote.document.write('<BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR>\n');
remote.document.write('<A NAME="loading"><HR></A><BR><FONT SIZE=5><STRONG>Loading Data...</STRONG></FONT>\n');

remote.document.write('<BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR>\n');
remote.document.write('&LT;SCRIPT LANGUAGE="JavaScript1.2"&GT;\n');
remote.document.write('function saveFields(){\n');
for (var i = 0; i < get("holddatalength"); i++) {
    remote.document.write("opener.parent.set('" + elemname(i) + "','"+
get(elemname(i)) + "');\n");
}
remote.document.write('\n');
remote.document.write('<SCRIPT LANGUAGE="JavaScript1.2">\n');
for (i = 0; i < header.arrayList.length; i++) {
remote.document.write('var ' + header.arrayList[i] + ' = ');
remote.document.write('opener.header.' + header.arrayList[i] + '\n');
remote.document.write('document.write("opener.parent.header.' +
header.arrayList[i] + ' = "' + ' + header.arrayList[i] + ' + ";\n\n");');
} //end for
remote.document.write('\n </SCR' + 'IPT>\n');
remote.document.write('var timeID =
setTimeout("opener.document.location.reload(); window.close()",
1500)\n');
remote.document.write('{}');
remote.document.write('\n &LT;/SCRIPT&GT;\n');
remote.document.write('</FORM></BODY>\n</HTML>');
remote.document.close();
}
```

Appendix B: Other Functions in Frameset Document
Copyright © 1999 IBM Corporation

```
52  function set(field,newdata)
53  {
54      doSet = "header.document.holddata." + field + ".value = " + "'" + " +
55      '" + newdata + "';";
56      eval(doSet);
57  }
58  // get receives one input and returns one value.
59  // The input is the name of the field whose value is to be returned.
60  // This function reads text from the fields of the HOLDDATA form and
61  // returns it
62  // to the calling program.
63  function get(name)
64  { if (name == "holddatalength") {return
65  header.document.holddata.length}
66  else { doGet = "ret = header.document.holddata." + name + ".value";
67  eval(doGet);
68  return ret
69  }
70  }
```

```

68 <BASE HREF="http://www.s390.ibm.com/ps0/psotool/interviews/">
69 <!DOCTYPE HTML PUBLIC "-//IETF//DTD HTML//EN">
70 <HTML>
71 <HEAD>
72   <META HTTP-EQUIV="Content-Type" CONTENT="text/html;
      charset=iso-8859-1">
73   <META NAME="owner"      CONTENT="gdunlap@us.ibm.com">
74   <META NAME="keywords"   CONTENT="S/390 IBM System/390 OS/390 parallel
      sysplex configuration setup interactive">
75   <META NAME="abstract"   CONTENT="This web-based tool helps S/390
      customers migrate to a Parallel Sysplex environment.">
76   <META NAME="author"     CONTENT="gcorbin@us.ibm.com">
77   <META NAME="contact"    CONTENT="gcorbin@us.ibm.com">
78   <META NAME="review"     CONTENT="19991231">
79   <META NAME="security"   CONTENT="public">
80   <SCRIPT language="JavaScript1.1">
81
82     // basic configuration status flags
83     naming_status = parent.get("naming_status");
84     naming_valid = "valid";
85     if ((parent.get("names1_valid") ==
25 "invalid")||(parent.get("names2_valid") == "invalid")) {naming_valid =
      "invalid"}
86
87     sw_status = parent.get("sw_status");
88     sw_valid = parent.get("sw1_valid");
30
89
90     hw_status = parent.get("hw_status");
91     hw_valid = "valid";
92     if ((parent.get("hw3_valid") == "invalid")||(parent.get("hw5_valid")
      == "invalid")) {hw_valid = "invalid"}
35
93
94     str1_status = parent.get("str1_status");
95     str1_valid = parent.get("str1_valid");
96
97     cds_status = parent.get("cds_status");
40
98     cds_valid = "valid";
99     if ((parent.get("cds1_valid") ==
      "invalid")||(parent.get("cds_sfm_valid") ==
      "invalid")||(parent.get("cds_arm_valid") ==
      "invalid")||(parent.get("cds_wlm_valid") ==
45 "invalid")||(parent.get("cds_logr_valid") == "invalid"))
100       {cds_valid = "invalid"}
101
  
```

```

102     sfm_status = parent.get("sfm_status");
103     sfm_valid = "valid";
104     jes2_status = parent.get("jes2_status");
105     jes2_valid = parent.get("jes2_valid");
5   106     racf_status = parent.get("racf_status");
107     racf_valid = "valid";
108     tape_status = parent.get("tape_status");
109     tape_valid = "valid";
110     ecs_status = parent.get("ecs_status");
10  111     ecs_valid = "valid";
112     logrec_status = parent.get("logrec_status");
113     logrec_valid = parent.get("logrec_valid");
114     operlog_status = parent.get("operlog_status");
115     operlog_valid = parent.get("operlog_valid");
15  116     parent.set("URL","interviews/ps_topics.html");
117
118     function loadFromDisk()
119     {
120         var xdist = screen.availWidth - 455;
20  121         load =
window.open('../load.html','loadWin','WIDTH=400,HEIGHT=105,screeny=405,s
screenx=' + xdist + ',resizable=0,menubar=0,status=0,scrollbars=1');
122         load.opener.name = 'opener';
123         load.focus();
25  124     }
125
126     function parentLink(url) {
127     parent.opener.document.location=url
128     parent.opener.focus();
30  129     }
130     function buildCheck(url)
131     {
132         // first see if all required tasks have been completed
133         if ((naming_status == "Not done")||(sw_status == "Not
35  done")||(hw_status == "Not done")||(str1_status == "Not
done")||(cds_status == "Not done"))
134         {alert("Please complete all required tasks before continuing with
the Build step.")}
135         else {
40  136             if ((naming_valid == "invalid")||(sw_valid ==
"invalid")||(hw_valid == "invalid")||(str1_valid ==
"invalid")||(cds_valid == "invalid")||(sfm_valid ==
"invalid")||(jes2_valid == "invalid")||(racf_valid ==
"invalid")||(tape_valid == "invalid")||(ecs_valid ==
45  "invalid")||(logrec_valid == "invalid")||(operlog_valid == "invalid"))
137             {alert("Please correct all invalid entries before
continuing with the Build step.")}

```

```

138         else{window.location = url}
139     }
140 } // end function
141
5 142
143 </SCRIPT>
144 <LINK REL="STYLESHEET" TYPE="text/css" HREF="/include/text.css">
145 </HEAD>
146
10 147 <BODY BGCOLOR="#FFFFFF">
148 <TABLE BORDER="0" WIDTH="560">
149 <TR>
150 <TD>
151 <FORM NAME="interview1">
15 152 <TABLE BORDER="0" WIDTH="100%">
153 <TR BGCOLOR="#c8d8f8">
154 <TD>
155 <FONT SIZE="2" FACE="Arial, helv">
156 <B>Parallel Sysplex Configuration: Interviews</B>
20 157 </FONT>
158 </TD>
159 <TD align="right">
160 <FONT SIZE="2" FACE="Arial, helv">
25 161 <A
   HREF="javascript:parentLink('../ps_intro.html');">Introduction</A>
162 </FONT>
163 </TD>
164 </TR>
165 </TABLE>
30 166 </TD>
167 </TR>
168 <TR>
169 <TD>
170 <FONT COLOR="#000000" SIZE="2" FACE="Arial, helv">
35 171 We begin with a series of interviews in which you'll answer
   questions
172 about the sysplex configuration that you are creating. Complete
   each interview topic
173 that is marked <B>Required</B>. When you have finished answering
40 all of
174 the interview questions, click <B>Build</B>. The Parallel Sysplex
175 Configuration Assistant will build a checklist of steps for you to
   follow,
176 as well as customized jobs and other data sets for you to use.
45 177 </FONT>
178 </TD>

```



```

213         if (cds_valid == "invalid")
{document.write('<IMG SRC="../../images/alert.gif">')}</SCRIPT></TD>
214     </TR>
215     <TR VALIGN="center">
5 216         <TD><A HREF="ps_sfm_pols.html">Sysplex failure management
(SFM) policies</A></TD>
217         <TD ALIGN="center">No</TD>
218         <TD CELLPADDING=0>&nbsp;<SCRIPT>if (sfm_status == "Done")
{document.write('<IMG SRC="../../images/complete.gif">')}
10 219         if (sfm_valid == "invalid")
{document.write('<IMG SRC="../../images/alert.gif">')}</SCRIPT></TD>
220     </TR>
221     <TR VALIGN="center" BGCOLOR="#C8D8F8">
222         <TH WIDTH="*"><FONT SIZE="2" FACE="Helvetica,
15 Arial">Interview Topics: Resource Sharing</FONT></TH>
223         <TH WIDTH="20"><FONT SIZE="2" FACE="Helvetica,
Arial">Required?</FONT></TH>
224         <TH WIDTH="20"><FONT SIZE="2" FACE="Helvetica,
Arial">Status</FONT></TH>
20 225     </TR>
226     <TR VALIGN='center'><TD><A HREF='ps_jes2.html'>JES2 checkpoint
data</A></TD><TD ALIGN='center'>No</TD><TD CELLPADDING=0> </TD></TR><TR
VALIGN='center'><TD><A HREF='ps_racf.html'>OS/390 Security Server
database</A></TD><TD ALIGN='center'>No</TD><TD CELLPADDING=0> </TD></TR>
25 227     <TR VALIGN="center">
228         <TD><A HREF="ps_tape.html">Tape devices (automatic tape
sharing feature)</A></TD>
229         <TD ALIGN="center">No</TD>
230         <TD CELLPADDING=0> </TD>
30 231     </TR>
232     <TR VALIGN="center">
233         <TD><A HREF="ps_ecs.html">Catalogs (enhanced catalog sharing
feature)</A></TD>
234         <TD ALIGN="center">No</TD>
35 235         <TD CELLPADDING=0> </TD>
236     </TR>
237     <TR VALIGN="center">
238         <TD><A HREF="ps_operlog.html">OPERLOG (system logger
feature)</A></TD>
40 239         <TD ALIGN="center">No</TD>
240         <TD CELLPADDING=0> </TD>
241     </TR>
242     <TR VALIGN="center">
243         <TD><A HREF="ps_logrec.html">LOGREC (system logger
45 feature)</A></TD>
244         <TD ALIGN="center">No</TD>
245         <TD CELLPADDING=0> </TD>

```



```

246         </TR>
247         <TR VALIGN="center">
248             <TD><A HREF="ps_str_map.html">Coupling Facility structure
5      mapping</A></TD>
249             <TD ALIGN="center">Yes</TD>
250             <TD CELLPADDING=0> </TD>
251         </TR>
252         <TR VALIGN="center">
253             <TD CELLPADDING=0 COLSPAN=3>
10      254             <TABLE BORDER=0 CELLSPACING=0 CELLPADDING=0
                WIDTH=100%><TR VALIGN="center">
255                 <TD ALIGN="left"><INPUT TYPE="button" NAME=Build
                VALUE="Build" onClick="buildCheck('../build/bld_basic.html');"></TD>
256                 <TD ALIGN="right">
15      257                 <INPUT TYPE="button" NAME=Load VALUE="Load Configuration Data"
                onClick="loadFromDisk();"><INPUT TYPE="button" NAME=Save VALUE="Save
                Configuration Data"
                onClick=parent.saveToDisk("interviews/ps_topics.html")>
258                 </TD>
20      259                 </TR></TABLE>
260             </TD>
261         </TR>
262     </TABLE>
263 </FORM>
25      264 </TD>
265 </TR>
266 </TABLE>
267 </WhiteSpace>
268 </TD>
30      269 </TR></TABLE>
270 </TR></TABLE>
271 </TR></TABLE>
272
35      273 <TABLE width="600" border="0" cellspacing="0" cellpadding="0">
274 <TR bgcolor="#000000">
275 <TD align="center" width="49"><A href="http://www.ibm.com/privacy/"
                class="nav" style="color: #ffffff;"><A
                href="http://www.ibm.com/privacy/" class="nav" Ttyle="color:
40      #ffffff;"><FONT face="Arial, sans-serif" size="-2"
                color="#ffffff"><B>Privacy</B></FONT></A></TD>
276 <TD bgcolor="#959595" width="1"><IMG src="http://www.ibm.com/i/c.gif"
                width="1" height="21"/></TD>
277 <TD align="center" width="49"><A href="http://www.ibm.com/legal/"
                class="nav" style="color: #ffffff;"><A href="http://www.ibm.com/legal/"
45      class="nav" Ttyle="color: #ffffff;"><FONT face="Arial, sans-serif"
                size="-2" color="#ffffff"><B>Legal</B></FONT></A></TD>

```

```

278 <TD bgcolor="#959595" width="1"><IMG src="http://www.ibm.com/i/c.gif"
width="1" height="1"/></TD>
279 <TD align="center" width="49"><A href="http://www.ibm.com/contact/"
class="nav" style="color: #ffffff;"><A
href="http://www.ibm.com/contact/" class="nav" Tyle="color:
#ffffff;"><FONT face="Arial, sans-serif" size="-2"
color="#ffffff"><B>Contact</B></FONT></A></TD>
280 <TD bgcolor="#959595" width="1"><IMG src="http://www.ibm.com/i/c.gif"
width="1" height="1"/></TD>
281 <TD width="450"> </TD></TR>
282 </TABLE>
283
284
285 </BODY>
286
287 </BODY>
288 </HTML>

```

[illegible]

Appendix D: Source Version of Save Page
Copyright © 1999 IBM Corporation

```

5 289 <BASE HREF="http://www.s390.ibm.com/ps0/psotool/">
290 <HTML>
291 <HEAD>
292 <META NAME="abstract" CONTENT="IBM System/390">
293 <META NAME="keywords" CONTENT="S/390 Parallel Sysplex Configuration
10 294 <META NAME="owner" CONTENT="gcorbin@us.ibm.com">
295 <META NAME="author" CONTENT="George Corbin">
296 <META NAME="review" CONTENT="990928">
297 <META NAME="security" CONTENT="public">
15 298 <TITLE>S/390 Parallel Sysplex Configuration Assistant (Save & Restore
Data)</TITLE>
299
300
301 </HEAD>
20 302 <BODY onLoad="saveFields()" onBlur="var timerID =
setTimeout('window.close()', 20000)">
303 <FORM NAME="restore">
304 <TABLE BORDER="0" WIDTH="560">
305 <TR>
306 <TD>
25 307 <TABLE BORDER="0" WIDTH="100%">
308 <TR BGCOLOR="#c8d8f8">
309 <TD>
310 <FONT SIZE="2" FACE="Arial, helv">
30 311 <B>S/390 Parallel Sysplex Configuration Assistant: Save & Restore
Data</B>
312 </FONT>
313 </TD>
314 </TR>
315 </TABLE>
35 316 </TD>
317 </TR>
318 <TR><TD><P>
319 This document contains the information you have entered into the S/390
Parallel Sysplex Configuration Assistant.</P></TD></TR>
40 320 <TR><TD><TABLE WIDTH="100%" BORDER="0">
321 <TR><TD VALIGN=Top><FONT COLOR="blue"><STRONG>To Save Your
Data:</STRONG></FONT>
322 <OL><LI>Select <STRONG>File</STRONG> and then <STRONG>Save
as...</STRONG> from the menubar at the top of this window.</LI>
45 323 <LI>In the Save As... dialog box, choose a name and directory location
for the configuration data file and click the Save button.</LI>
324 <LI>Close this Window.</LI>

```

```

325 </OL></TD>
326 </TR>
327 <TR><TD><HR NOSHADE COLOR="#CCCCCC">Once you have saved your data, you
5      can quit the S/390 Parallel Sysplex Configuration Assistant and return
      to it later. When you return, you will be given instructions to load the
      saved file and resume your work.</TD></TR></TABLE></TD></TR>
328 <TR>
329 <TD WIDTH="100%" HEIGHT="40">
330 <TABLE BORDER="0" CELLPADDING="0" CELLSPACING="3" WIDTH="100%">
10 331 <TR><TD COLSPAN="6" WIDTH="100%"><HR NOSHADE COLOR="#CCCCCC"></TD></TR>
332 </TABLE>
333 </TD></TR></TABLE>
334
15  <BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR>
    <BR><BR><BR>
335 <A NAME="loading"><HR></A><BR><FONT SIZE=5><STRONG>Loading
    Data...</STRONG></FONT>
336
20  <BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR><BR>
    <BR><BR><BR>
337 <SCRIPT LANGUAGE="JavaScript1.2">
338
339 function saveFields(){
340 opener.parent.set('hassaved','yes');
25 341 opener.parent.set('URL','interviews/ps_topics.html');
342 opener.parent.set('netscape_browser','');
343 opener.parent.set('naming_status','Not done');
344 opener.parent.set('sw_status','Not done');
345 opener.parent.set('hw_status','Not done');
30 346 opener.parent.set('str1_status','Not done');
347 opener.parent.set('cds_status','Not done');
348 opener.parent.set('sfm_status','Not done');
349 opener.parent.set('jes2_status','Not done');
350 opener.parent.set('racf_status','Not done');
35 351 opener.parent.set('tape_status','Not done');
352 opener.parent.set('ecs_status','Not done');
353 opener.parent.set('operlog_status','Not done');
354 opener.parent.set('logrec_status','Not done');
355 opener.parent.set('names1_valid','valid');
40 356 opener.parent.set('names2_valid','valid');
357 opener.parent.set('sw1_valid','valid');
358 opener.parent.set('hw3_valid','valid');
359 opener.parent.set('hw5_valid','valid');
360 opener.parent.set('cds1_valid','valid');
45 361 opener.parent.set('cds_sfm_valid','valid');
362 opener.parent.set('cds_arm_valid','valid');

```

```

363 opener.parent.set('cds_wlm_valid','valid');
364 opener.parent.set('cds_logr_valid','valid');
365 opener.parent.set('jes2_valid','valid');
366 opener.parent.set('operlog_valid','valid');
5 367 opener.parent.set('logrec_valid','valid');
368 opener.parent.set('str1_valid','valid');
369 opener.parent.set('ps_con_ae_valid','invalid');
370 opener.parent.set('formatds_status','yes');
371 opener.parent.set('hlq','');
10 372 opener.parent.set('hlq2','');
373 opener.parent.set('suffix','PS');
374 opener.parent.set('pvolser','');
375 opener.parent.set('avolser','');
376 opener.parent.set('bvolser','');
15 377 opener.parent.set('plexname','SYSPLEX1');
378 opener.parent.set('memnum','2');
379 opener.parent.set('maxmem','8');
380 opener.parent.set('sysaction',' ');
381 opener.parent.set('sys_select',' ');
20 382 opener.parent.set('cfnum','2');
383 opener.parent.set('cfaction',' ');
384 opener.parent.set('cf_select',' ');
385 opener.parent.set('sub_num','10');
386 opener.parent.set('con_action',' ');
25 387 opener.parent.set('con_select',' ');
388 opener.parent.set('time_source','etr');
389 opener.parent.set('etrzone','yes');
390 opener.parent.set('simetrid','01');
391 opener.parent.set('gmt_direction','west');
30 392 opener.parent.set('gmt_hours','00');
393 opener.parent.set('gmt_minutes','00');
394 opener.parent.set('jesver','JES2');
395 opener.parent.set('secprod','RACF');
396 opener.parent.set('grsprod','GRS');
35 397 opener.parent.set('sms_active','yes');
398 opener.parent.set('cics','yes');
399 opener.parent.set('cics_regions','');
400 opener.parent.set('ims','yes');
401 opener.parent.set('dfsmshsm','yes');
40 402 opener.parent.set('rmm','yes');
403 opener.parent.set('dbshared','no');
404 opener.parent.set('racfdb_ds','1');
405 opener.parent.set('racf_b_size','1024');
406 opener.parent.set('jes_mas','yes');
45 407 opener.parent.set('jes_str1','CKPT1');

```

	408	opener.parent.set('jesdsn1','');
	409	opener.parent.set('jesdsn2','');
	410	opener.parent.set('jesaltds','');
	411	opener.parent.set('jesvol1','');
5	412	opener.parent.set('jesvol2','');
	413	opener.parent.set('jesaltvol','');
	414	opener.parent.set('jes_records','1500');
	415	opener.parent.set('plexdsn1','');
	416	opener.parent.set('plexdsn2','');
10	417	opener.parent.set('plexdsn3','');
	418	opener.parent.set('xcfgroup','100');
	419	opener.parent.set('plex_pvolser','');
	420	opener.parent.set('plex_avolser','');
	421	opener.parent.set('plex_bvolser','');
15	422	opener.parent.set('cfrmdsn1','');
	423	opener.parent.set('cfrmdsn2','');
	424	opener.parent.set('cfrmdsn3','');
	425	opener.parent.set('cfrm_pvolser','');
	426	opener.parent.set('cfrm_avolser','');
20	427	opener.parent.set('cfrm_bvolser','');
	428	opener.parent.set('sfmdsn1','');
	429	opener.parent.set('sfmdsn2','');
	430	opener.parent.set('sfmdsn3','');
	431	opener.parent.set('sfm_pvolser','');
25	432	opener.parent.set('sfm_avolser','');
	433	opener.parent.set('sfm_bvolser','');
	434	opener.parent.set('sfm_maxpol','6');
	435	opener.parent.set('sfmpols','1');
	436	opener.parent.set('polaction','');
30	437	opener.parent.set('polselect','');
	438	opener.parent.set('armdsn1','');
	439	opener.parent.set('armdsn2','');
	440	opener.parent.set('armdsn3','');
	441	opener.parent.set('arm_pvolser','');
35	442	opener.parent.set('arm_avolser','');
	443	opener.parent.set('arm_bvolser','');
	444	opener.parent.set('arm_maxpol','6');
	445	opener.parent.set('armpols','1');
	446	opener.parent.set('armaction','');
40	447	opener.parent.set('armselect','');
	448	opener.parent.set('wlmdsn1','');
	449	opener.parent.set('wlmdsn2','');
	450	opener.parent.set('wlmdsn3','');
	451	opener.parent.set('wlm_pvolser','');
45	452	opener.parent.set('wlm_avolser','');

```

453 opener.parent.set('wlm_bvolser','');
454 opener.parent.set('wlm_maxpol','6');
455 opener.parent.set('wkloads','32');
456 opener.parent.set('srvclass','128');
5 457 opener.parent.set('applenv','100');
458 opener.parent.set('schenv','100');
459 opener.parent.set('logrdsn1','');
460 opener.parent.set('logrdsn2','');
461 opener.parent.set('logrdsn3','');
10 462 opener.parent.set('logr_pvolser','');
463 opener.parent.set('logr_avolser','');
464 opener.parent.set('logr_bvolser','');
465 opener.parent.set('logrec_records','');
466 opener.parent.set('logrec_hlq','');
15 467 opener.parent.set('logrec_ucat','');
468 opener.parent.set('logrec_vol','');
469 opener.parent.set('oplog_records','');
470 opener.parent.set('oplog_hlq','');
471 opener.parent.set('oplog_ucat','');
20 472 opener.parent.set('oplog_vol','');
473 opener.parent.set('oplog_cf_time','30');
474 opener.parent.set('oplog_lib','');
475 opener.parent.set('oplog_dasd_time','7 ');
476 opener.parent.set('tapenum','');
25 477 opener.parent.set('maxcat','1');
478 opener.parent.set('xcfmem','50');
479
480 opener.parent.header.sysArray = [["SYS1", "CPC1", "LP1", [["NORMAL",
30 1]], [], [], [], [], ["SYS2", "CPC2", "LP2", [["NORMAL", 1]], [], [],
[], []]];
481 opener.parent.header.cfArray = [["CF1", "9674", "02", "000000000000",
"00", "1", "6000"], ["CF2", "9674", "02", "000000000000", "00", "1",
"6000"]];
482 opener.parent.header.sfmArray = [["NORMAL", "All systems have equal
35 weight."]];
483 opener.parent.header.armArray = [["ARMPOL00", "Unless an element is
specifically defined in an ARM policy, it will fall into this restart
group."]];
484 opener.parent.header.conArray = [["PLEXMSTR", "", "3270-X", "MASTER",
40 "", "", "*ALL"]];
485 opener.parent.header.strArray = [["XCF", "IXCPATH1", "956", "956", 0,
1], ["XCF", "IXCPATH2", "16316", "16316", 1, 0], ["GRS", "ISGLOCK",
"8448", "8448", 0, 1]];
486 opener.parent.header.grsDSName = [];
45 487 opener.parent.header.grsHLName = [];
488 opener.parent.header.checklist = [];

```

```

5  489 opener.parent.header.threshStructure = ["IXCPATH1", "IXCPATH2",
      "ISGLOCK", "CKPT1", "IRRXCFOO_P", "IRRXCFOO_B", "IEFAUTOS",
      "SYSIGGCAS_ECS", "OPERLOG", "LOGREC"];
      490 opener.parent.header.threshValue = ["80", "80", "80", "80", "95", "95",
      "90", "80", "90", "90"];
      491 opener.parent.header.rel9 = [];
      492
      493 var timeID = setTimeout("opener.document.location.reload();
      window.close()", 1500)
10  494 }
      495
      496
      497 </SCRIPT>
      498 </FORM></BODY>
15  499 </HTML>

```

POU920000026US1

Appendix E: Source Version of Load Page
Copyright © 1999 IBM Corporation

```
5 500 <!DOCTYPE HTML PUBLIC "-//IETF//DTD HTML//EN">
501 <HTML>
502 <HEAD>
503   <META HTTP-EQUIV="Content-Type" CONTENT="text/html;
    charset=iso-8859-1">
10 504   <META NAME="owner"      CONTENT="jim@us.ibm.com">
505   <META NAME="keywords"    CONTENT="S/390 IBM System/390 OS/390 parallel
    sysplex configuration setup interactive">
506   <META NAME="abstract"    CONTENT="This web-based tool helps S/390
    customers migrate to a Parallel Sysplex environment.">
15 507   <META NAME="author"     CONTENT="gcorbin@us.ibm.com">
508   <META NAME="contact"     CONTENT="gcorbin@us.ibm.com">
509   <META NAME="review"      CONTENT="19991231">
510   <META NAME="security"    CONTENT="public">
511   <TITLE>Parallel Sysplex Configuration Tool: Introduction and Task
    Menu</TITLE>
20 512 <SCRIPT>
513   function setlink(){
514     var newurl = "file:/// " + document.findfile.getfile.value + "#loading";
515     document.links[0].href=newurl;
516   }
25 517 </SCRIPT>
518
519 </HEAD>
520
30 521 <BODY bgcolor="#FFFFFF">
522 <FORM NAME="findfile">
523   <P><FONT COLOR="#000000" size="2" face="Arial, helv, helvetica, sans
    serif"><STRONG>To Reload Previous Data:<BR>1) Enter Filename:</STRONG>
524   <input type="file" name="getfile" value="" onClick=setlink();
    onBlur=setlink();><BR>
35 525   <STRONG>2) And Click: <BR></STRONG></FONT>
526   <A HREF="file:///C|/sysplexg.html#loading">Reload Previous Data</A></P>
527 </FORM>
528 </BODY>
529 </HTML>
```

Appendix F
Copyright © 1999 IBM Corporation

```
530 <BASE HREF="http://www.s390.ibm.com/ps0/psotool/">
531 <HTML>
532 <HEAD>
533   <META HTTP-EQUIV="Content-Type" CONTENT="text/html;
      charset=iso-8859-1">
534   <META NAME="owner"      CONTENT="gdunlap@us.ibm.com">
535   <META NAME="keywords"   CONTENT="S/390 IBM System/390 OS/390 parallel
      sysplex configuration setup interactive">
536   <META NAME="abstract"   CONTENT="This web-based tool helps S/390
      customers migrate to a Parallel Sysplex environment.">
537   <META NAME="author"     CONTENT="gcorbin@us.ibm.com">
538   <META NAME="contact"    CONTENT="gcorbin@us.ibm.com">
539   <META NAME="review"     CONTENT="19991231">
540   <META NAME="security"   CONTENT="public">
541
542   <LINK REL="STYLESHEET" TYPE="text/css" HREF="/include/text.css">
543 </HEAD>
544 <SCRIPT LANGUAGE="JavaScript1.2">
545
546   function redirect()
547   {
548     for (var i=0; i<document.links.length; i++)
549     {
550       document.links[i].href= "javascript:parentLink(' " +
      document.links[i].href + "')";
551     }
552   }
553
554   function parentLink(url) {
555     parent.opener.document.location=url;
556     parent.opener.focus();
557   }
558
559
560 </SCRIPT>
561 <BODY BGCOLOR="white" alink="white" vlink="white" topmargin="0"
      leftmargin="0" marginheight="0" marginwidth="0"
      onLoad="parent.getCookieData(); redirect();
      parent.basefrm.location='interviews/ps_topics.html';">
562 <table width="100%" cellpadding="0" cellspacing="0" border="0">
563 <tr><td align="left" BGCOLOR="#0033CC" valign="top"><A
      HREF="http://www.ibm.com/" border="0" target="new"></A></td>
```

```
</table>
```

```
5 566
567
568 <SCRIPT LANGUAGE="JavaScript1.2">
569
10 570 // set recieves two inputs: a field name and a value to change that
    field to.
571 // This function writes values to the hidden text fields in the HOLDDATA
    form on this page.
572 function set(field,newdata)
573 {
15 574     doSet = "document.holddata." + field + ".value = " + '""' + " + ' " +
        newdata + "';";
575     eval(doSet);
576 }
577 // get receives one input and returns one value.
20 578 // The input is the name of the field whose value is to be returned.
579 // This function reads text from the fields of the HOLDDATA form and
    returns it
580 // to the calling program.
581 function get(name)
25 582 { if (name == "holddatalength") {return document.holddata.length}
    else { doGet = "ret = document.holddata." + name + ".value";
583     eval(doGet);
584     return ret}
585 }
30 586
587 function name(index)
588 { return document.holddata[index].name }
589
590 </SCRIPT>
591
35 592 <FORM NAME="holddata">
593 <!-- Variable indicating if data has been saved -->
594 <INPUT TYPE="hidden" NAME="hassaved" VALUE="no">
595 <INPUT TYPE="hidden" NAME="URL" VALUE="interviews/ps_topics.html">
596 <INPUT TYPE="hidden" NAME="netscape_browser" VALUE="">
40 597
598 <!-- planning task status indicators for basic setup -->
599 <INPUT TYPE="hidden" NAME="naming_status" VALUE="Not done">
600 <INPUT TYPE="hidden" NAME="sw_status" VALUE="Not done">
601 <INPUT TYPE="hidden" NAME="hw_status" VALUE="Not done">
45 602 <INPUT TYPE="hidden" NAME="str1_status" VALUE="Not done">
603 <INPUT TYPE="hidden" NAME="cds_status" VALUE="Not done">
```

```

604 <INPUT TYPE="hidden" NAME="sfm_status"      VALUE="Not done">
605 <!-- planning task status indicators for resource sharing setup -->
606 <INPUT TYPE="hidden" NAME="jes2_status"      VALUE="Not done">
607 <INPUT TYPE="hidden" NAME="racf_status"      VALUE="Not done">
5  608 <INPUT TYPE="hidden" NAME="tape_status"      VALUE="Not done">
609 <INPUT TYPE="hidden" NAME="ecs_status"      VALUE="Not done">
610 <INPUT TYPE="hidden" NAME="operlog_status"    VALUE="Not done">
611 <INPUT TYPE="hidden" NAME="logrec_status"    VALUE="Not done">
612
10 613 <!-- validation placeholders for each page -->
614 <INPUT TYPE="hidden" NAME="rames1_valid"     VALUE="valid">
615 <INPUT TYPE="hidden" NAME="names2_valid"     VALUE="valid">
616 <INPUT TYPE="hidden" NAME="sw1_valid"        VALUE="valid">
617 <INPUT TYPE="hidden" NAME="hw3_valid"        VALUE="valid">
15 618 <INPUT TYPE="hidden" NAME="hw5_valid"        VALUE="valid">
619 <INPUT TYPE="hidden" NAME="cds1_valid"       VALUE="valid">
620 <INPUT TYPE="hidden" NAME="cds_sfm_valid"    VALUE="valid">
621 <INPUT TYPE="hidden" NAME="cds_arm_valid"    VALUE="valid">
20 622 <INPUT TYPE="hidden" NAME="cds_wlm_valid"    VALUE="valid">
623 <INPUT TYPE="hidden" NAME="cds_logr_valid"   VALUE="valid">
624 <INPUT TYPE="hidden" NAME="jes2_valid"       VALUE="valid">
625 <INPUT TYPE="hidden" NAME="operlog_valid"    VALUE="valid">
626 <INPUT TYPE="hidden" NAME="logrec_valid"     VALUE="valid">
627 <INPUT TYPE="hidden" NAME="str1_valid"       VALUE="valid">
25 628 <INPUT TYPE="hidden" NAME="ps_con_ae_valid"  VALUE="invalid">
629
630
631 <!-- build status indicators for basic setup-->
632 <INPUT TYPE="hidden" NAME="formatds_status"  VALUE="yes">
30 633
634 <!-- naming conventions -->
635 <INPUT TYPE="hidden" NAME="hlq"              VALUE="">
636 <INPUT TYPE="hidden" NAME="hlq2"            VALUE="">
637 <INPUT TYPE="hidden" NAME="suffix"          VALUE="PS">
35 638 <INPUT TYPE="hidden" NAME="pvolser"          VALUE="">
639 <INPUT TYPE="hidden" NAME="avolser"          VALUE="">
640 <INPUT TYPE="hidden" NAME="bvolser"          VALUE="">
641
642 <!-- hardware environment -->
40 643 <INPUT TYPE="hidden" NAME="plexname"          VALUE="SYSPLEX1">
644 <INPUT TYPE="hidden" NAME="memnum"            VALUE="2">
645 <INPUT TYPE="hidden" NAME="maxmem"            VALUE="8">
646 <INPUT TYPE="hidden" NAME="sysaction">
647 <INPUT TYPE="hidden" NAME="sys_select">
45 648 <INPUT TYPE="hidden" NAME="cfnum"              VALUE="2">

```

3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45

```
649 <INPUT TYPE="hidden" NAME="cfaction">
650 <INPUT TYPE="hidden" NAME="cf_select">
651 <INPUT TYPE="hidden" NAME="sub_num" VALUE="10">
652 <INPUT TYPE="hidden" NAME="con_action">
5 653 <INPUT TYPE="hidden" NAME="con_select">
654 <INPUT TYPE="hidden" NAME="time_source" VALUE="etr">
655 <INPUT TYPE="hidden" NAME="etrzone" VALUE="yes">
656 <INPUT TYPE="hidden" NAME="simetrid" VALUE="01">
657 <INPUT TYPE="hidden" NAME="gmt_direction" VALUE="west">
10 658 <INPUT TYPE="hidden" NAME="gmt_hours" VALUE="00">
659 <INPUT TYPE="hidden" NAME="gmt_minutes" VALUE="00">
660
661 <!-- software environment -->
662 <INPUT TYPE="hidden" NAME="jesver" VALUE="JES2">
15 663 <INPUT TYPE="hidden" NAME="secprod" VALUE="RACF">
664 <INPUT TYPE="hidden" NAME="grsprod" VALUE="GRS">
665 <INPUT TYPE="hidden" NAME="sms_active" VALUE="yes">
666 <INPUT TYPE="hidden" NAME="cics" VALUE="yes">
667 <INPUT TYPE="hidden" NAME="cics_regions" VALUE="">
20 668 <INPUT TYPE="hidden" NAME="ims" VALUE="yes">
669 <INPUT TYPE="hidden" NAME="dfsmshsm" VALUE="yes">
670 <INPUT TYPE="hidden" NAME="rmm" VALUE="yes">
671
672 <!-- security stuff -->
25 673 <INPUT TYPE="hidden" NAME="dbshared" VALUE="no">
674 <INPUT TYPE="hidden" NAME="racfdb_ds" VALUE="1">
675 <INPUT TYPE="hidden" NAME="racf_p_size" VALUE="5120">
676 <INPUT TYPE="hidden" NAME="racf_b_size" VALUE="1024">
677
30 678 <!-- jes2 stuff -->
679 <INPUT TYPE="hidden" NAME="jes_mas" VALUE="yes">
680 <INPUT TYPE="hidden" NAME="jes_str1" SIZE="8" VALUE="CKPT1">
681 <INPUT TYPE="hidden" NAME="jesdsn1" VALUE="">
682 <INPUT TYPE="hidden" NAME="jesdsn2" VALUE="">
35 683 <INPUT TYPE="hidden" NAME="jesaltds" VALUE="">
684 <INPUT TYPE="hidden" NAME="jesvol1" SIZE="6" VALUE="">
685 <INPUT TYPE="hidden" NAME="jesvol2" SIZE="6" VALUE="">
686 <INPUT TYPE="hidden" NAME="jesaltvol" SIZE="6" VALUE="">
687 <INPUT TYPE="hidden" NAME="jes_records" VALUE="1500">
40 688
689
690 <!-- Sysplex couple dataset stuff -->
691 <INPUT TYPE="hidden" NAME="plexdsn1" VALUE="">
692 <INPUT TYPE="hidden" NAME="plexdsn2" VALUE="">
45 693 <INPUT TYPE="hidden" NAME="plexdsn3" VALUE="">
```

	694	<INPUT TYPE="hidden" NAME="xcfgroup"	VALUE="100">
	695	<INPUT TYPE="hidden" NAME="plex_pvolser"	VALUE="">
	696	<INPUT TYPE="hidden" NAME="plex_avolser"	VALUE="">
	697	<INPUT TYPE="hidden" NAME="plex_bvolser"	VALUE="">
5	698		
	699	<!-- CFRM couple dataset stuff -->	
	700	<INPUT TYPE="hidden" NAME="cfrmdsn1"	VALUE="">
	701	<INPUT TYPE="hidden" NAME="cfrmdsn2"	VALUE="">
	702	<INPUT TYPE="hidden" NAME="cfrmdsn3"	VALUE="">
10	703	<INPUT TYPE="hidden" NAME="cfrm_pvolser"	VALUE="">
	704	<INPUT TYPE="hidden" NAME="cfrm_avolser"	VALUE="">
	705	<INPUT TYPE="hidden" NAME="cfrm_bvolser"	VALUE="">
	706		
	707	<!-- sfm stuff -->	
15	708	<INPUT TYPE="hidden" NAME="sfmdsn1"	VALUE="">
	709	<INPUT TYPE="hidden" NAME="sfmdsn2"	VALUE="">
	710	<INPUT TYPE="hidden" NAME="sfmdsn3"	VALUE="">
	711	<INPUT TYPE="hidden" NAME="sfm_pvolser"	VALUE="">
	712	<INPUT TYPE="hidden" NAME="sfm_avolser"	VALUE="">
20	713	<INPUT TYPE="hidden" NAME="sfm_bvolser"	VALUE="">
	714	<INPUT TYPE="hidden" NAME="sfm_maxpol"	VALUE="6">
	715	<INPUT TYPE="hidden" NAME="sfmpols"	VALUE="1">
	716	<INPUT TYPE="hidden" NAME="polaction">	
	717	<INPUT TYPE="hidden" NAME="polselect">	
25	718		
	719	<!-- arm stuff -->	
	720	<INPUT TYPE="hidden" NAME="armdsn1"	VALUE="">
	721	<INPUT TYPE="hidden" NAME="armdsn2"	VALUE="">
	722	<INPUT TYPE="hidden" NAME="armdsn3"	VALUE="">
30	723	<INPUT TYPE="hidden" NAME="arm_pvolser"	VALUE="">
	724	<INPUT TYPE="hidden" NAME="arm_avolser"	VALUE="">
	725	<INPUT TYPE="hidden" NAME="arm_bvolser"	VALUE="">
	726	<INPUT TYPE="hidden" NAME="arm_maxpol"	VALUE="6">
	727	<INPUT TYPE="hidden" NAME="armpols"	VALUE="1">
35	728	<INPUT TYPE="hidden" NAME="armaction">	
	729	<INPUT TYPE="hidden" NAME="armselect">	
	730		
	731	<!-- wlm stuff -->	
	732	<INPUT TYPE="hidden" NAME="wlmdsn1"	VALUE="">
40	733	<INPUT TYPE="hidden" NAME="wlmdsn2"	VALUE="">
	734	<INPUT TYPE="hidden" NAME="wlmdsn3"	VALUE="">
	735	<INPUT TYPE="hidden" NAME="wlm_pvolser"	VALUE="">
	736	<INPUT TYPE="hidden" NAME="wlm_avolser"	VALUE="">
	737	<INPUT TYPE="hidden" NAME="wlm_bvolser"	VALUE="">
45	738	<INPUT TYPE="hidden" NAME="wlm_maxpol"	VALUE="6">

5

10

15

20

25

30

35

40

45

```

739 <INPUT TYPE="hidden" NAME="wkloads"          VALUE="32">
740 <INPUT TYPE="hidden" NAME="srvclass"          VALUE="128">
741 <INPUT TYPE="hidden" NAME="applenv"           VALUE="100">
742 <INPUT TYPE="hidden" NAME="schenv"            VALUE="100">
743
744 <!-- logger stuff -->
745 <INPUT TYPE="hidden" NAME="logrdsn1"          VALUE="">
746 <INPUT TYPE="hidden" NAME="logrdsn2"          VALUE="">
747 <INPUT TYPE="hidden" NAME="logrdsn3"          VALUE="">
748 <INPUT TYPE="hidden" NAME="logr_pvolser"       VALUE="">
749 <INPUT TYPE="hidden" NAME="logr_avolser"       VALUE="">
750 <INPUT TYPE="hidden" NAME="logr_bvolser"       VALUE="">
751 <INPUT TYPE="hidden" NAME="logrec_records"     VALUE="">
752 <INPUT TYPE="hidden" NAME="logrec_hlq"        VALUE="">
753 <INPUT TYPE="hidden" NAME="logrec_ucat"        VALUE="">
754 <INPUT TYPE="hidden" NAME="logrec_vol"        VALUE="">
755 <INPUT TYPE="hidden" NAME="oplog_records"     VALUE="">
756 <INPUT TYPE="hidden" NAME="oplog_hlq"         VALUE="">
757 <INPUT TYPE="hidden" NAME="oplog_ucat"        VALUE="">
758 <INPUT TYPE="hidden" NAME="oplog_vol"         VALUE="">
759 <INPUT TYPE="hidden" NAME="oplog_cf_time"     VALUE="30">
760 <INPUT TYPE="hidden" NAME="oplog_lib"         VALUE="">
761 <INPUT TYPE="hidden" NAME="oplog_dasd_time"   VALUE="7 ">
762
763 <!-- automatic tape sharing stuff -->
764 <INPUT TYPE="hidden" NAME="tapenum"           VALUE="">
765
766 <!-- ECS stuff -->
767 <INPUT TYPE="hidden" NAME="maxcat"            VALUE="1">
768
769 <!-- BUILD it -->
770 <INPUT TYPE="hidden" NAME="xcfmem"            VALUE="50">
771 </FORM>
772 <SCRIPT LANGUAGE="JavaScript1.2">
773
774
775
776
//-----
-----//
777 // This is an array to keep track of the arrays.  If you add an array,
// please add it's name here.  //
778 arrayList = new
Array("sysArray","cfArray","sfmArray","armArray","conArray","strArray","
grsDSName","grsHLName","checklist","threshStructure","threshValue","rel9
");

```

```

779      //-----
780      -----//
5  781  // This section builds an initial sysArray, the array of systems in the
      sysplex
782      sysCols = 3
783      sysArray = new Array();
784      memnum = 2;
10 785      for (rowCnt=0; rowCnt < memnum; rowCnt++)
786      {
787          sysArray[rowCnt] = new Array();
788          sysArray[rowCnt][0] = "SYS" + (rowCnt+1);
789          sysArray[rowCnt][1] = "CPC" + (rowCnt+1);
15 790          sysArray[rowCnt][2] = "LP" + (rowCnt+1);
791      // SFM related data
792          sysArray[rowCnt][3] = new Array();
793          sysArray[rowCnt][3][0] = new Array();
794          sysArray[rowCnt][3][0][0] = "NORMAL";
20 795          sysArray[rowCnt][3][0][1] = 1;
796      // MCS-related data
797          sysArray[rowCnt][4] = new Array(); // which consoles it
physically connects to
798          sysArray[rowCnt][5] = new Array(); // which consoles it
25 listens to for commands
799          sysArray[rowCnt][6] = new Array(); // which consoles it routes
messages to
800          sysArray[rowCnt][7] = new Array(); // os390 release
801      } //end for loop on rowCnt
30 802  // This section builds an initial cfArray, the array of Coupling
      Facilities in the sysplex
803      cfCols = 7;
804      cfArray = new Array();
805      cfnum = 2;
35 806      for (rowCnt=0; rowCnt < cfnum; rowCnt++)
807      {
808          cfArray[rowCnt] = new Array();
809          cfArray[rowCnt][0] = "CF" + (rowCnt+1);
810          cfArray[rowCnt][1] = "9674";
40 811          cfArray[rowCnt][2] = "02";
812          cfArray[rowCnt][3] = "000000000000";
813          cfArray[rowCnt][4] = "00";
814          cfArray[rowCnt][5] = "1";
815          cfArray[rowCnt][6] = "6000";
45 816      } // end of loop on rowCnt
817  // This section builds an initial sfmArray, the array of SFM policies

```



```

818     sfmArray = new Array();
819     // Policy 1, Normal
820     sfmArray[0] = new Array();
821     sfmArray[0][0] = "NORMAL";
5 822     sfmArray[0][1] = "All systems have equal weight.";
823     // This section builds an initial armArray, the array of ARM policies
824     armArray = new Array();
825     // Build row 0 -- entries for sample policy ARMPOL00
826     armArray[0] = new Array();
10 827     armArray[0][0] = "ARMPOL00";
828     armArray[0][1] = "Unless an element is specifically defined in an
ARM policy, it will fall into this restart group.";
829     // This section builds an initial conArray, the array of MCS consoles
830     conArray = new Array();
15 831     // a sample console definition entry
832     conArray[0] = new Array();
833     conArray[0][0] = "PLEXMSTR";           // console name
834     conArray[0][1] = "";                   // device number
835     conArray[0][2] = "3270-X";             // unit type
20 836     conArray[0][3] = "MASTER";           // authority
837     conArray[0][4] = "";                   // route code
838     conArray[0][5] = "";                   // Connected to field
839     conArray[0][6] = "*ALL";               // Connected to field
840     // This section builds an initial strArray, the array of CF structures
25 841     // Start with columns 0 thru 3 for component name (e.g., GRS),
structure name, initial size, and max size
842     strArray = new Array();
843     // Build rows 0 thru 3 -- entries for XCF structures
844     strArray[0] = new Array();
30 845     strArray[0][0] = "XCF";
846     strArray[0][1] = "IXCPATH1";
847     strArray[0][2] = "956";
848     strArray[0][3] = "956";
849     strArray[0][4] = 0;
35 850     strArray[0][5] = 1;
851
852     strArray[1] = new Array();
853     strArray[1][0] = "XCF";
854     strArray[1][1] = "IXCPATH2";
40 855     strArray[1][2] = "16316";
856     strArray[1][3] = "16316";
857     strArray[1][4] = 1;
858     strArray[1][5] = 0;
859
45 860     // Build row 2 -- entry for GRS structure
861     strArray[2] = new Array();

```

```

862      strArray[2][0] = "GRS";
863      strArray[2][1] = "ISGLOCK";
864      strArray[2][2] = "8448";
865      strArray[2][3] = "8448";
5 866      strArray[2][4] = 0;
867      strArray[2][5] = 1;
868
869      // Continue with columns 4 thru n for CF preferences
870      cfnum = 2;
10 871      for (rowCnt=0; rowCnt < 5; rowCnt++)
872          {
873              for (colCnt=4; colCnt < cfnum; colCnt++)
874                  {
875                      strArray[rowCnt][colCnt] = "";
15 876                  } // end colCnt loop
877          } // end rowCnt loop
878
879      // array for hldng DataSet names for GRS insertions into
GRSRNLxx Parmlib member
20 880      // Input is received from the SW section panel 2
881      grsDSName = new Array();
882      grsHLName = new Array();
883      // array for storing status on build page
884      checklist = new Array();
25 885
886      threshStructure = new Array();
887      threshStructure[0] = "IXCPATH1";
888      threshStructure[1] = "IXCPATH2";
889      threshStructure[2] = "ISGLOCK";
30 890      threshStructure[3] = "CKPT1";
891      threshStructure[4] = "IRRXCFO0_P";
892      threshStructure[5] = "IRRXCFO0_B";
893      threshStructure[6] = "IEFAUTOS";
894      threshStructure[7] = "SYSIGGCAS_ECS";
35 895      threshStructure[8] = "OPERLOG";
896      threshStructure[9] = "LOGREC";
897
898      threshValue = new Array();
899      threshValue[0] = "80";
40 900      threshValue[1] = "80";
901      threshValue[2] = "80";
902      threshValue[3] = "80";
903      threshValue[4] = "95";
904      threshValue[5] = "95";
45 905      threshValue[6] = "90";

```

```

906         threshValue[7] = "80";
907         threshValue[8] = "90";
908         threshValue[9] = "90";
909
5   910         rel9 = new Array();
911
912
913
10  914     </SCRIPT>
915     </WhiteSpace>
916     </td>
917 </tr></table>
918 </tr></table>
919 </tr></table>
15  920
921     <table width="600" border="0" cellspacing="0" cellpadding="0">
922     <tr bgcolor="#000000">
923     <td align="center" width="49"><a href="http://www.ibm.com/privacy/"
20  class="nav" style="color: #ffffff;"><font face="Arial, sans-serif"
size="-2" color="#ffffff"><b>Privacy</b></font></a></td>
924     <td bgcolor="#959595" width="1"></td>
925     <td align="center" width="49"><a href="http://www.ibm.com/legal/"
25  class="nav" style="color: #ffffff;"><font face="Arial, sans-serif"
size="-2" color="#ffffff"><b>Legal</b></font></a></td>
926     <td bgcolor="#959595" width="1"></td>
927     <td align="center" width="49"><a href="http://www.ibm.com/contact/"
30  class="nav" style="color: #ffffff;"><font face="Arial, sans-serif"
size="-2" color="#ffffff"><b>Contact</b></font></a></td>
928     <td bgcolor="#959595" width="1"></td>
929     <td width="450">&nbsp;</td></tr>
930 </table>
35  931 <SCRIPT LANGUAGE="JavaScript">
932
933 <!-- Keylime Software 4.1 13/07/2000
934 // IBM Baseline Tag
935 var kl_siteID = "77";
40  936 var kl_tagProtocol = "";
937 var kl_akamaiPath = "a1944.g.akamai.net/f/1944/1482/8h/";
938 if (location.protocol == "
939
940 </BODY>
45  941
942 </BODY>

```

943 </HTML>

POU920000026US1

CLAIMS

What is claimed is:

- 5 1. In an information handling system in which a client application displays a first hypertext document to a user for entry of user data, said client application having a function for locally saving displayed documents, a method of providing local data persistence for said client application, said method being performed by said client application and comprising the steps of:
receiving user data from said user;
10 receiving a save command from said user to save said user data; and
in response to receiving said save command, dynamically creating a new hypertext document containing said user data and displaying a message prompting the user to save the new document using said function for locally saving displayed documents.
- 15 2. The method of claim 1 in which said client application receives said first hypertext document from a server application.
3. The method of claim 1 in which said hypertext documents are HTML documents.
- 20 4. The method of claim 1 in which said message is created as a part of said new hypertext document.
5. The method of claim 1, comprising the further step of:
receiving a restore command from said user to restore previously saved user data; and
25 in response to receiving said restore command, repopulating said first document with said previously saved user data.

6. In an information handling system in which a client application displays a first hypertext document to a user for entry of user data, said client application having a function for locally saving displayed documents, apparatus for providing local data persistence for said client application, said apparatus being associated with said client application and comprising:

means for receiving user data from said user;

means for receiving a save command from said user to save said user data; and

means responsive to receiving said save command for dynamically creating a new hypertext document containing said user data and displaying a message prompting the user to save the new document using said function for locally saving displayed documents.

7. The apparatus of claim 6 in which said message is created as a part of said new hypertext document.

8. The apparatus of claim 6, further comprising:

means for receiving a restore command from said user to restore previously saved user data; and

means responsive to receiving said restore command for repopulating said first document with said previously saved user data.

9. A program storage device readable by a machine, tangibly embodying a program of instructions executable by the machine to perform method steps for providing local data persistence for a client application in an information handling system in which a client application displays a first hypertext document to a user for entry of user data, said client application having a function for locally saving displayed documents, said method steps comprising:

receiving user data from said user;

receiving a save command from said user to save said user data; and

in response to receiving said save command, dynamically creating a new hypertext document containing said user data and displaying a message prompting the user to save the new document using said function for locally saving displayed documents.

10. The program storage device of claim 9 in which said message is created as a part of said new hypertext document.

5 11. The program storage device of claim 9, comprising the further step of:
receiving a restore command from said user to restore previously saved user data; and
in response to receiving said restore command, repopulating said first document with said previously saved user data.

continued

METHOD AND APPARATUS FOR PROVIDING LOCAL DATA PERSISTENCE FOR WEB APPLICATIONS

ABSTRACT OF THE DISCLOSURE

5

A method and apparatus for providing local data persistence for a Web server application. A Web page provided to a client application (e.g., a Web browser) by the server application contains a data entry area as well as a save button and a restore button. When the user actuates the save button, the Web page dynamically creates a new page that contains the data to be saved and a message prompting the user to save the new page in a user-designated location by using the file-saving function of the Web browser. The user may then close the original Web page, and the new page will remain saved locally. The user may then return to the original Web page and actuate the restore button to repopulate the original Web page with the data that has been saved locally. The save page contains a script function which becomes active when the page is loaded to perform the desired restoration function.

10

15

continued on next page

119

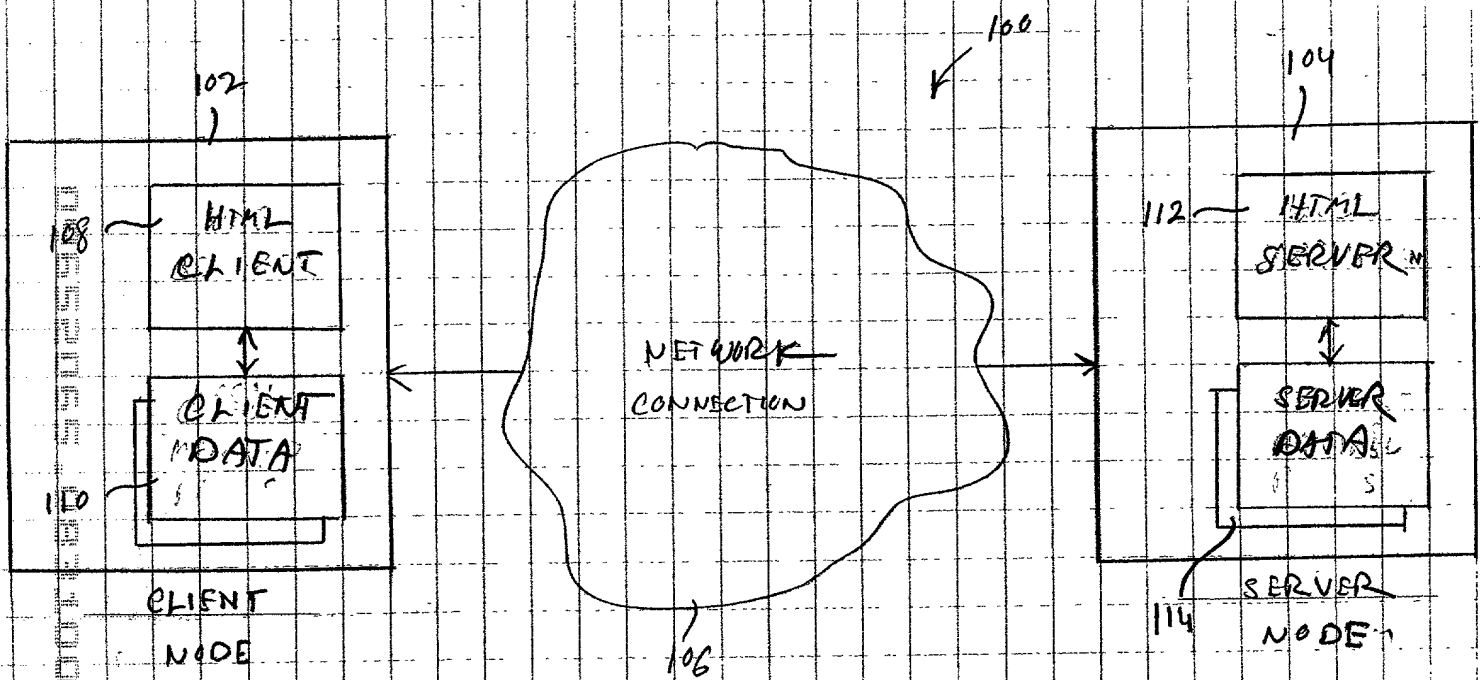


FIG. 1

POU 20000026 US1
219

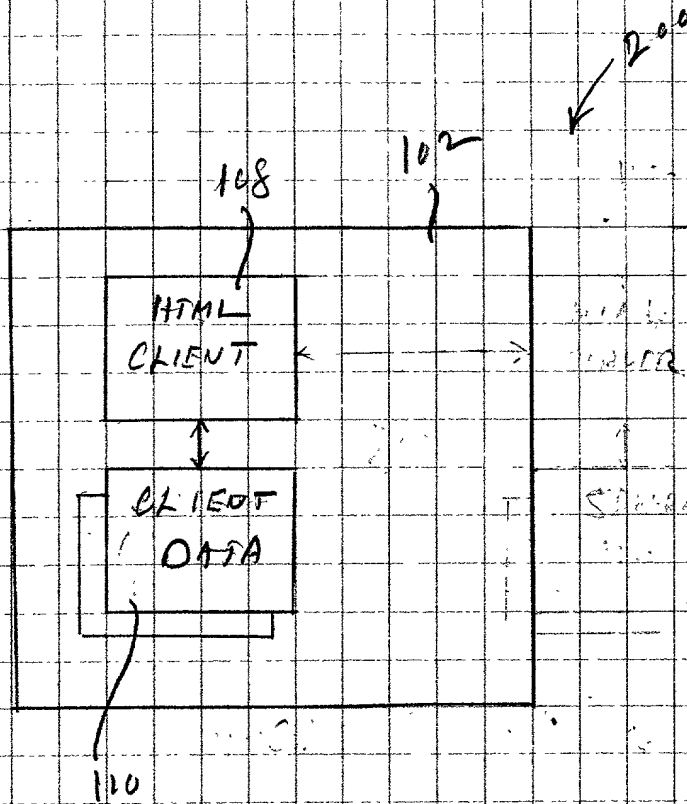


FIG. 2

57390 Parallel Sysplex Configuration Assistant - Netscape

IBM

Parallel Sysplex Configuration: Interviews Introduction

We begin with a series of interviews in which you'll answer questions about the sysplex configuration that you are creating. Complete each interview topic that is marked **Required**. When you have finished answering all of the interview questions, click **Build**. The Parallel Sysplex Configuration Assistant will build a checklist of steps for you to follow, as well as customized jobs and other data sets for you to use.

☒ = Complete ☐ = Invalid Data

Interview Topics: Sysplex Definition	Required	Status
Sysplex-wide naming conventions	Yes	
Software environment	Yes	
Hardware components	Yes	
Couple data sets	Yes	
Sysplex failure management (SFM) policies	No	

Interview Topics: Resource Sharing	Required?	Status
JES2 checkpoint data	No	
OS/390 Security Server database	No	
Tape devices (automatic tape sharing feature)	No	
Catalogs (enhanced catalog sharing feature)	No	
OPERLOG (system logger feature)	No	
LOGREC (system logger feature)	No	
Coupling Facility structure mapping	Yes	

300a

302

300b

308

306

304

300

FIG. 3

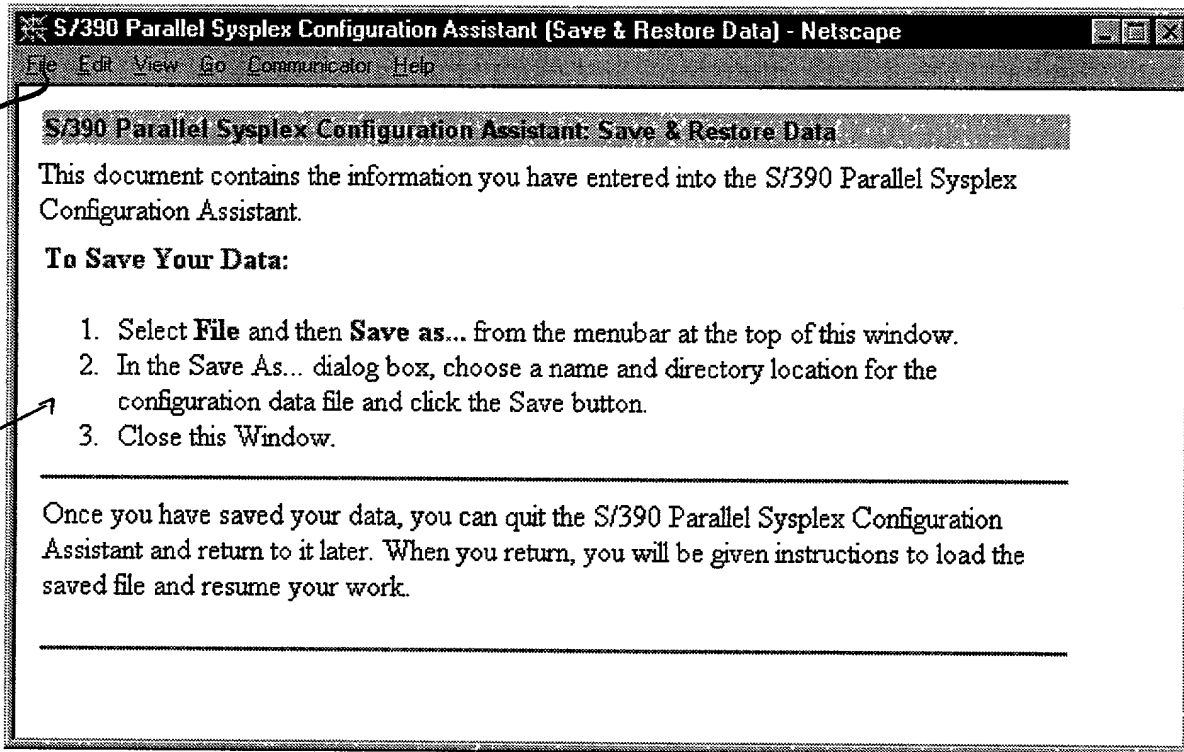


FIG. 4

5/9



FIG. 5

Year	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100																																																		
Population	1000000	1050000	1100000	1150000	1200000	1250000	1300000	1350000	1400000	1450000	1500000	1550000	1600000	1650000	1700000	1750000	1800000	1850000	1900000	1950000	2000000	2050000	2100000	2150000	2200000	2250000	2300000	2350000	2400000	2450000	2500000	2550000	2600000	2650000	2700000	2750000	2800000	2850000	2900000	2950000	3000000	3050000	3100000	3150000	3200000	3250000	3300000	3350000	3400000	3450000	3500000	3550000	3600000	3650000	3700000	3750000	3800000	3850000	3900000	3950000	4000000	4050000	4100000	4150000	4200000	4250000	4300000	4350000	4400000	4450000	4500000	4550000	4600000	4650000	4700000	4750000	4800000	4850000	4900000	4950000	5000000	5050000	5100000	5150000	5200000	5250000	5300000	5350000	5400000	5450000	5500000	5550000	5600000	5650000	5700000	5750000	5800000	5850000	5900000	5950000	6000000	6050000	6100000	6150000	6200000	6250000	6300000	6350000	6400000	6450000	6500000	6550000	6600000	6650000	6700000	6750000	6800000	6850000	6900000	6950000	7000000	7050000	7100000	7150000	7200000	7250000	7300000	7350000	7400000	7450000	7500000	7550000	7600000	7650000	7700000	7750000	7800000	7850000	7900000	7950000	8000000	8050000	8100000	8150000	8200000	8250000	8300000	8350000	8400000	8450000	8500000	8550000	8600000	8650000	8700000	8750000	8800000	8850000	8900000	8950000	9000000	9050000	9100000	9150000	9200000	9250000	9300000	9350000	9400000	9450000	9500000	9550000	9600000	9650000	9700000	9750000	9800000	9850000	9900000	9950000	10000000

POU920000076US1

Le19

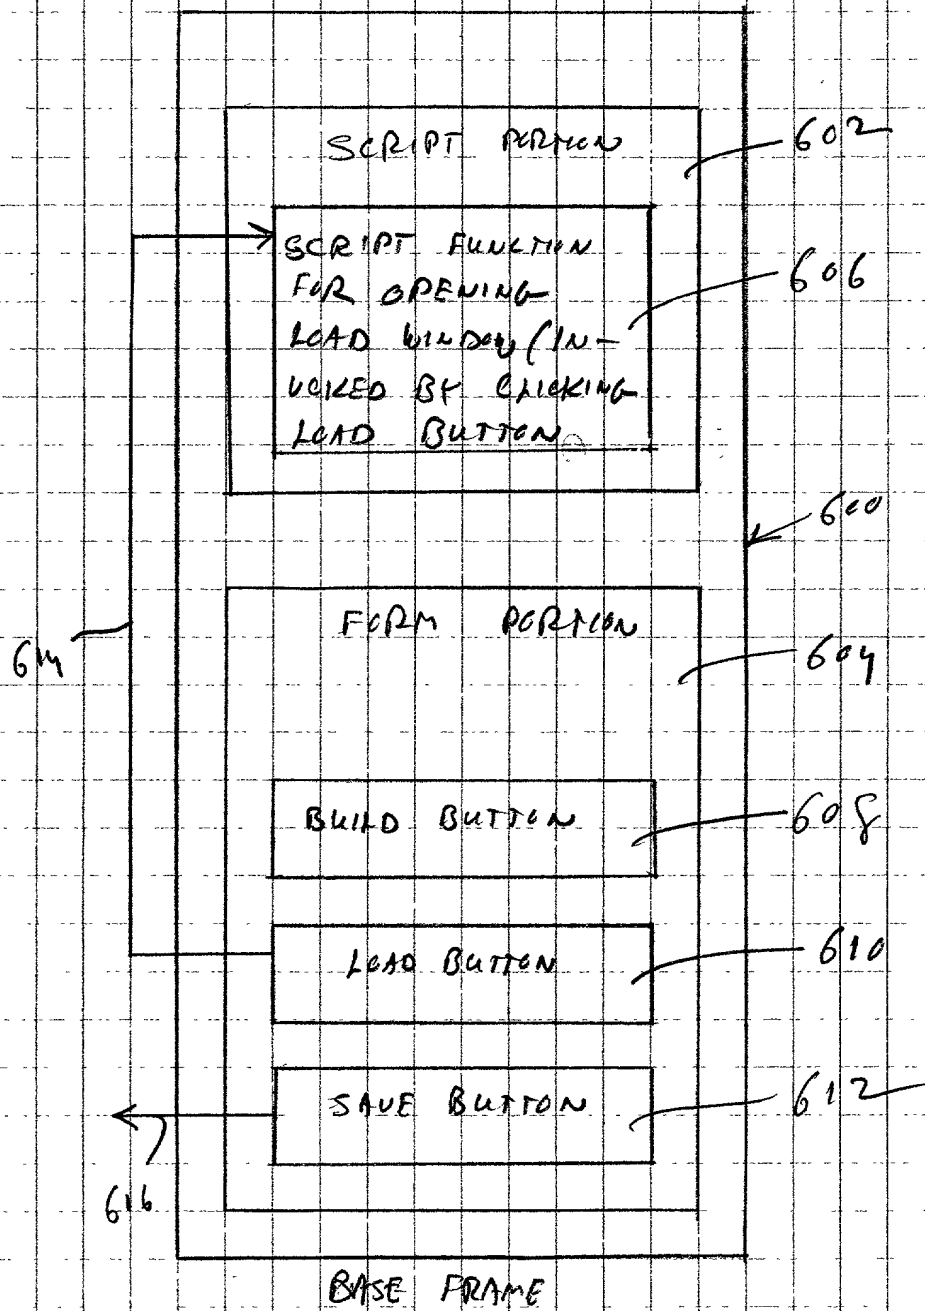


FIG. 6

POU920000026 US1

719

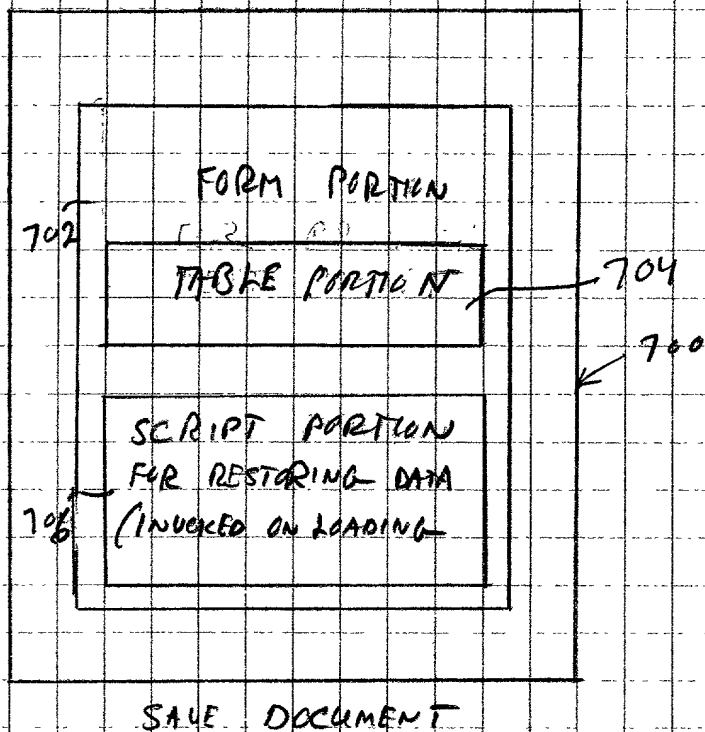


FIG. 7

POU920000026 US1

8/9

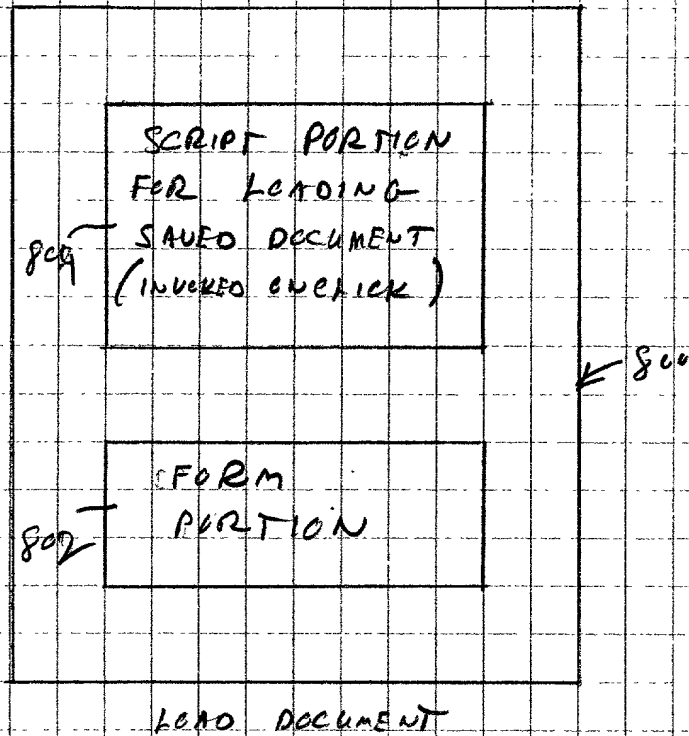


FIG. 8

FIG. 9

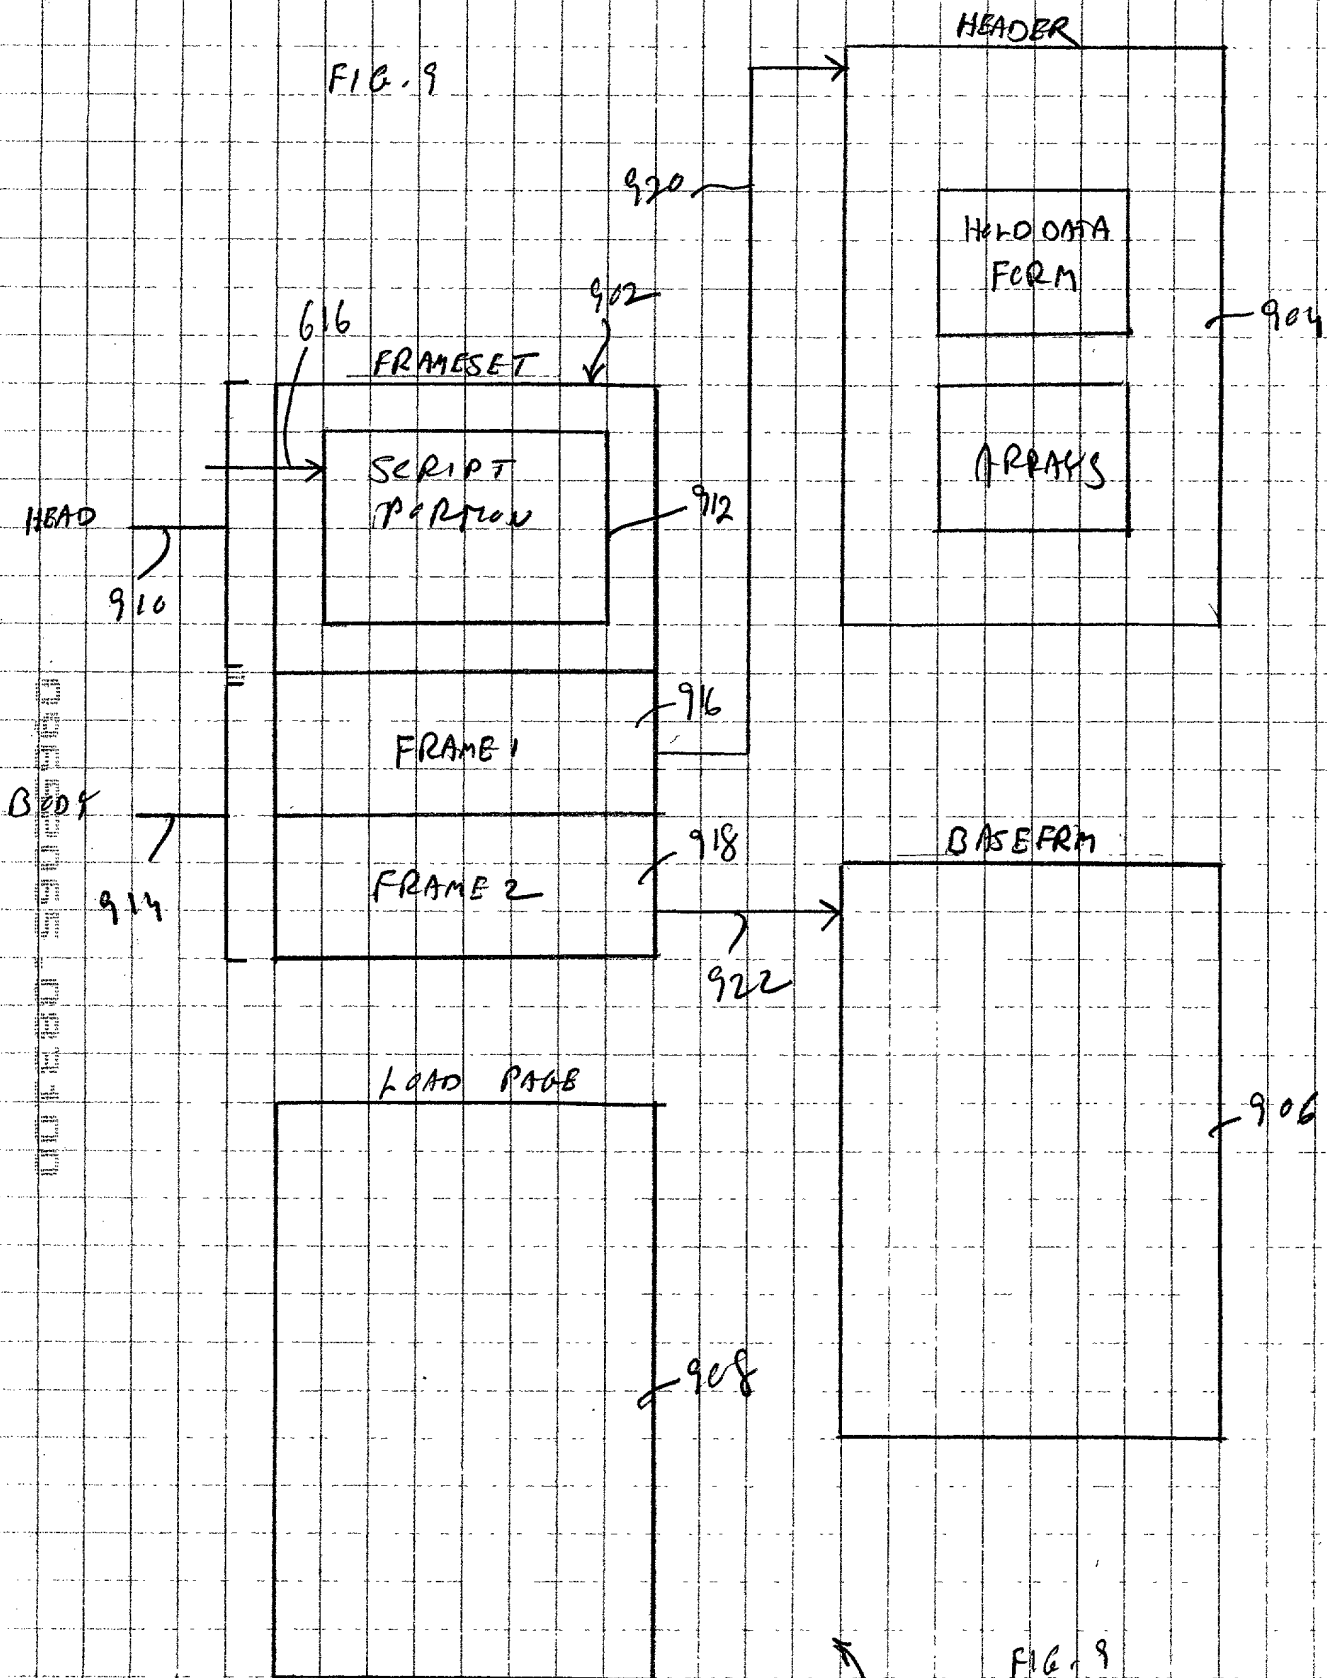


FIG. 9

900

Docket No.
POU920000026US1

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Method And Apparatus For Providing Local Data Persistence For Web Applications

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as United States Application No. or PCT International Application Number _____ and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)			Priority Not Claimed
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

William B. Porter, Reg. No. 33,135

Floyd A. Gonzalez, Reg. No. 26,732

Lynn L. Augspurger, Reg. No. 24,227

William A. Kinnaman, Jr., Reg. No. 27,650

Lily Neff, Reg. No. 38,254

Marc A. Ehrlich, Reg. No. 39,966

Lawrence D. Cutter, Reg. No. 28,501

Christopher A. Hughes, Reg. No. 26,914

Edward A. Pennington, Reg. No. 32,588

John E. Hoel, Reg. No. 26,279

Joseph C. Redmond, Reg. No. 18,753

Andrew J. Wojnicki, Jr., Reg. No. 43,995

Send Correspondence to: William A. Kinnaman, Jr.
IBM Corporation, IPLAW
2455 South Road, M/S P386
Poughkeepsie, NY 12601

Direct Telephone Calls to: *(name and telephone number)*
William A. Kinnaman, Jr. Telephone: (845) 433-1175

Full name of sole or first inventor

George E. Corbin

8/31/2000
Date

Sole or first inventor's signature

Residence

174 Cardinal Road, Hyde Park, NY 12538

Citizenship

United States of America

Post Office Address

174 Cardinal Road, Hyde Park, NY 12538

Full name of second inventor, if any

Joseph A. Kardash

8/31/2000
Date

Second inventor's signature

Residence

3 Valerie Court, Hyde Park, NY 12538

Citizenship

United States of America

Post Office Address

3 Valerie Court, Hyde Park, NY 12538